# **PCT**

COMMUNICATION IN CASES FOR WHICH

## From the INTERNATIONAL BUREAU

EFFERT, BRESSEL UND KOLLEGEN

Radickestrasse 48 12489 Berlin

EINGEGANGEN

NO OTHER FORM IS APPLICABLE	ALLEMAGNE 12. Nov. 2004
	ALLEMAGNE 12. Nov. 2004  Erl
Date of mailing (day/month/year)	7
03 November 2004 (03.11.2004)	
Applicant's or agent's file reference P60184PCT	REPLY DUE see paragraph 1 below
International application No.	International filing date (day/month/year)
PCT/EP2004/002208	04 March 2004 (04.03.2004)
Applicant  ATOTECH DEUTSCHLAND GMBH	
1. REPLY DUE within months/days from the	above date of mailing
NO REPLY DUE, however, see below	
MPORTANT COMMUNICATION	
INFORMATION ONLY	
2. COMMUNICATION:	
The applicant in respect of the above identified international application is notified that the receiving Office (RO/EP) has stamped an incorrect international filing date on the first page of the request and has now informed the International Bureau of the corrected date.	
Please correct all notifications previously sent by the International Bureau to indicate the correct filing date of:	
04 March 2004 (04.03.04)	
instead of:	
04 February 2004 (04.02.04)	
A copy of this notification has been sent to the receiving Office (RO/EP) and the designated Offices concerned	
The International Bureau of WIPO	Australia de 65 cm
24 shamin des Calautanes	Authorized officer

34, chemin des Colombettes 1211 Geneva 20, Switzerland

Jocelyne REY-MILLET (Fax: 338 89 75)

Facsimile No. (41-22) 338.89.75

Telephone No. (41-22) 338.99.43

### **CORRECTED VERSION**

#### (19) World Intellectual Property Organization

International Bureau



## | HITTO CONTROL OF HITTOCOM CONTROL CONT

(43) International Publication Date 23 September 2004 (23.09.2004)

**PCT** 

(10) International Publication Number WO 2004/081262 A1

(51) International Patent Classification7: 5/18, H05K 3/24 C25D 7/12,

(21) International Application Number:

PCT/EP2004/002208

(22) International Filing Date: 4 March 2004 (04.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 103 11 575.7


10 March 2003 (10.03.2003) Di

- (71) Applicant (for all designated States except US):
  ATOTECH DEUTSCHLAND GMBH [DE/DE];
  Erasmusstrasse 20, 10553 Berlin (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): REENTS, Bert [DE/DE]; Bötzowstrasse 31, 10407 Berlin (DE). MAGAYA, Tafadzwa [ZW/DE]; Sickingenstrasse 77, 10553 Berlin (DE).

- (74) Agent: EFFERT, BRESSEL UND KOLLEGEN; Radickestrasse 48, 12489 Berlin (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF ELECTROPLATING A WORKPIECE HAVING HIGH-ASPECT RATIO HOLES

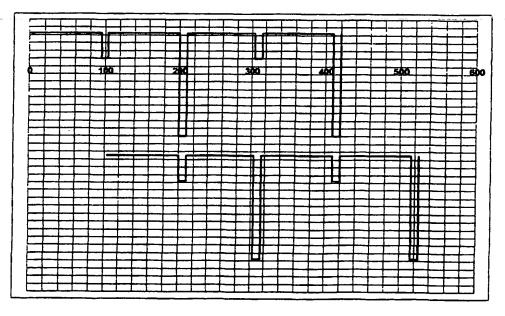

(57) Abstract: In order to electroplate workpieces comprising high-aspect ratio holes a method is disclosed comprising the steps bringing the workpiece and at least one anode into contact with a metal plating electrolyte, and applying a voltage between the workpiece and the anodes, to the effect that a current flow is provided to the workpiece. The current flow is a pulse reverse current flow having a frequency of at most about 6 Hertz. According to the frequency each cycle time comprises at least one forward current pulse and at least one reverse current pulse.